



LEAPTON
SOLAR



SWITCH YOUR LIFE

ENERGY STORAGE SOLUTIONS →



Parallel Box-A400 BP05-H05

- Compatible with single or dual battery interfaces from different inverter brands.
- Flexible combinations to achieve 10kWh to 300kWh, meeting various household energy needs.



■ Headquarters: Leapton Energy Co., Ltd. ☎ 81-78-382-3182
📍 F6 Tosei Building 1-2-1 Aioicho Chuo-ku, Kobe-shi, Hyogo-ken 650-0025, Japan

■ Factory: Leapton Solar (Changshu) Co., Ltd. ☎ 86-512-88800068
📍 No.9 Sunshine Avenue, Changshu, Suzhou city, Jiangsu province, 215500, P. R. China

🌐 www.leaptonpv.com

✉ info@leaptonenergy.com

Model name

BP05-H05

Operating voltage [V]	40~700
Rated charge/discharge current [A]	200
Max. charge/discharge current [A]	400

ENVIRONMENT REQUIREMENT


Operating charge/ discharge temperature range [°C]	0~55
Storage temperature [°C]	-20 ~ +55 (3 months) / 0 to 40 (1 year)
Humidity [%]	5%~95%
Altitude [m]	≤2000
Protection	IP65

GENERAL


Dimensions(LxWxH) [mm]	335*232*130
Weight [kg]	7
Expected life [years]	5
Certificates	CE

DIAGRAM

CONNECT WITH EL-A05

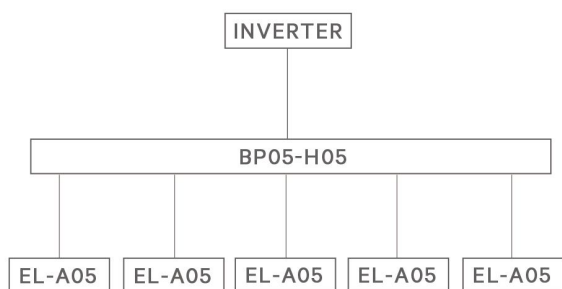

CONNECT WITH EH-B05

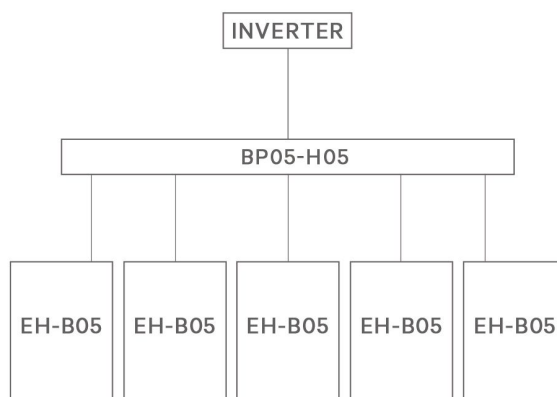

CONNECT WITH EL-A10.24

